

Network Ready Access Control Panel

Network Ready Access Control Panel

Main Features:


- On-board network interface
- Compact design
- One panel supports up to 16 readers using RS-485
- Can be linked with up to 254 ACC1000 controllers
- Support for up to 255 door groups
- Support for up to 15,000 users
- Built-in UPS function
- 11,000 event memory
- Anti-Pass-Back supported
- (Use alone with ECL-ACC900 – ECL-ACC950)



ECL-ACC1010
I/O Expansion 8 DI & 8 DO Board
Ethernet Interface 10 Base-T
(Optional)



ECL-ACC1000
Main Board

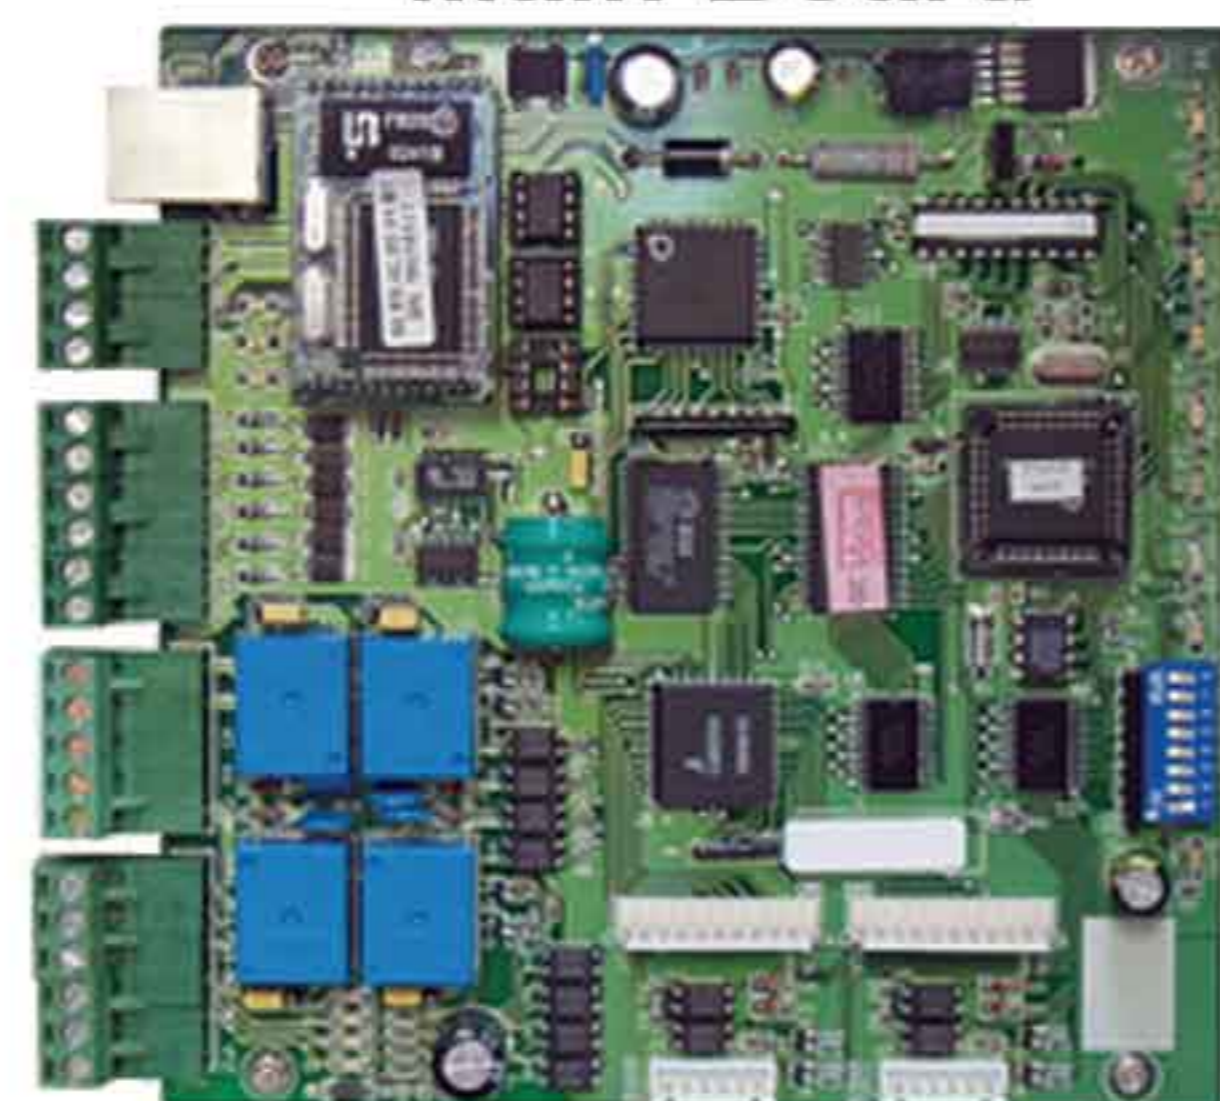

Note: Power Supply for ECL-ACC1000 Not Included



Specifications

Item #: ECL-ACC1000
Serial interface: RS-485, 9600 baud, N, 8, 13 (3 connections, 2 for readers, 1 for PC)
UPS Function: Case support rechargeable battery
Dynamic door Assignment: Supported
Emergency door release: Supported
RS-485 readers supported: 16
Wiegand readers supported: 2
Schedule door release: Supported
Schedule door arming: Supported
Time zone: 63
Door groups: 255
Programmable holidays: 120
Request to exit: Supported
Relay inputs: 4 (Expandable to 16) 3amp
Relay outputs: 4 (Expandable to 16) 3amp
Programmable card expiration: Supported
Auto diagnostic: No user intervention necessary
Voltage: 9-24 VDC variable auto detection
Current draw: 2.5 watts
Temperature/Humidity: -10 Deg. C –50 Deg. C, 90% non condensing
Dimensions: 180(L) x 231(W) x 62(H)mm